

AMERICH®

SIRENA™ 7234



DIMENSIONS

72" x 34" x 24" deep (1829 x 914 x 533 mm)
Gallon to Overflow = 85 (Liters = 322)
Height to Overflow = 15¾" (400 mm)

MATERIAL

Polymer Composite

TUB FLOOR

Non - Textured

UNDERMOUNT:

This tub is not designed for undermount installation.




APPROVALS & COMPLIANCE



Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

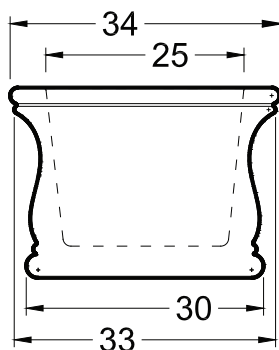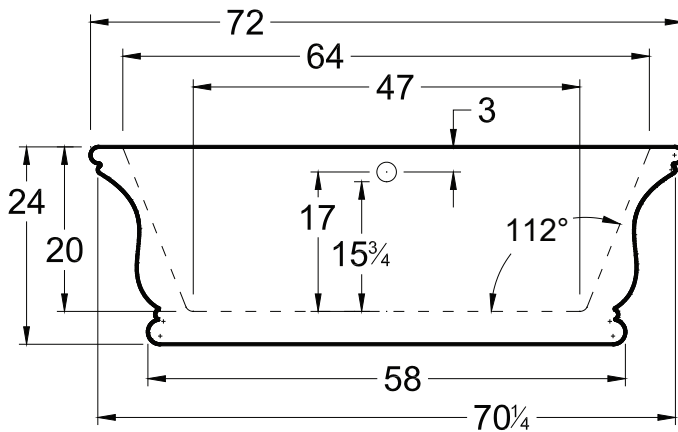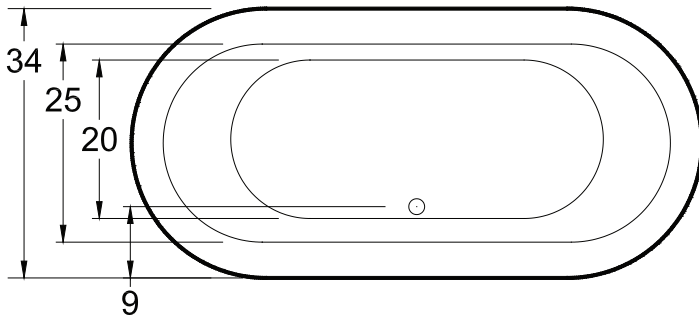

★ Made in the USA

All bathtub dimensions are ± 1/2"

Last Update 1/20/21
Always check our website for the most updated specifications: Americh.com


LEGEND



Remote Blower Connection



REMOTE CONTROL
(With INVISIBLE MAGNETIC HOLDER)

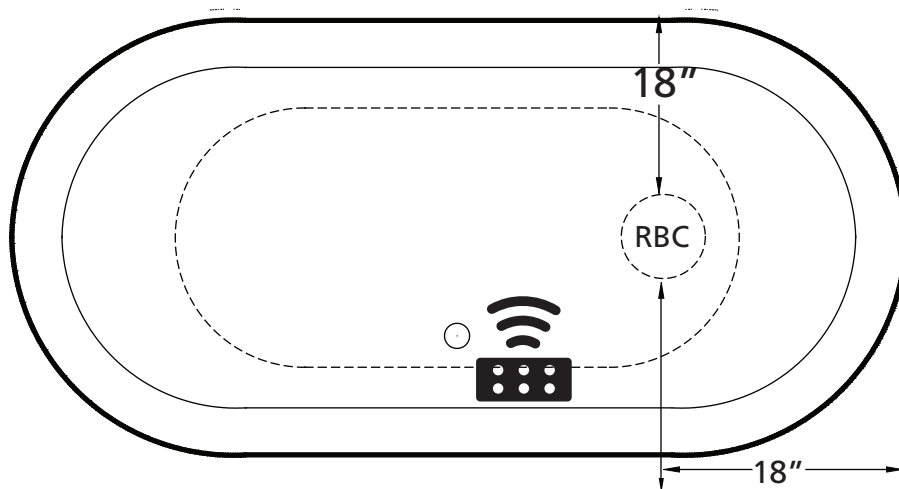

Airbath System II

Blower must be remotely located
(Diagram is required for custom blower connection)

STANDARD EQUIPMENT

- Americh Remote Control (with AirBath System only)
- Integral Waste & Overflow

OPTIONAL ACCESSORIES

- Dual Color (Premium Color Upcharge)
- Pillows: 12" - Angle
- Lo Profile Tub Edge
- Waste & Overflow Upgrade
- Linear Waste & Overflow

INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- The bath must be secured to the floor by applying a bead of silicone around the base
- Hot water supply should be 65-75% of tub capacity or greater.

ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.